DATA SHEET Stubby

Ref. 1013

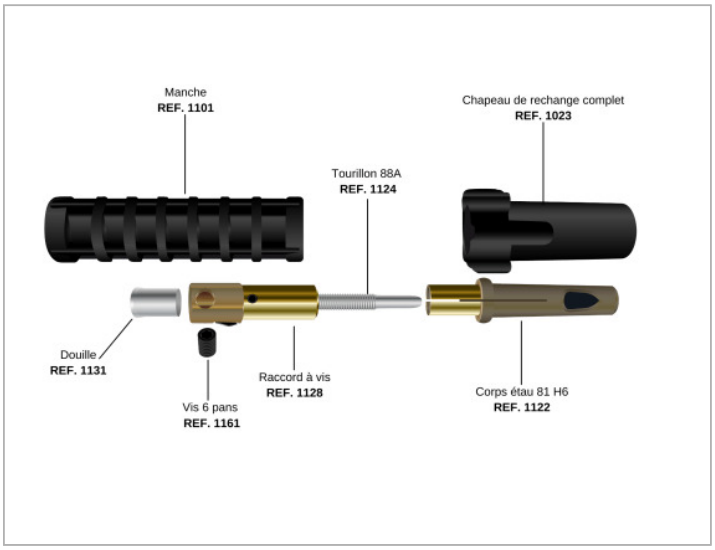

MAXIMAL INTENSITY	MAXIMAL INTENSITY	CABLE SECTION	MAXIMUM ELECTRODE DIAMETER	INDICATIVE UNIT WEIGHT
400A at 35%	300A at 60%	50 mm²	6.3 mm	460 g

See on our website

- In compliance with EN-60-974-11
- Electrode blocking by screwing, right-hand pitch

Related spare parts :

- Ref. 1023: Complete cap for Stubby
- Ref. 1101: Handle for Stubby
- Ref. 1124 88A Trunnion for Stubby
- Ref. 1122: Vice body 81 H6 for Stubby
- Ref. 1128: Screw fitting for Stubby and Master
- Ref. 1129 : Pin
- Ref. 1130: Spring
- Ref. 1131: End-sleeve
- Ref. 1133: Screw connection + Stud + Spring + Sleeve + Screw
- Ref. 1161: Hexagonal screw

Soudo-Metal
382 chemin du Mont Rivel
39300 Champagnole FRANCE
Tél 03 84 66 39 10
Fax 03 84 66 39 11