




MAXIMAL
INTENSITY
300A at 35%



MAXIMAL
INTENSITY
250A at 60%

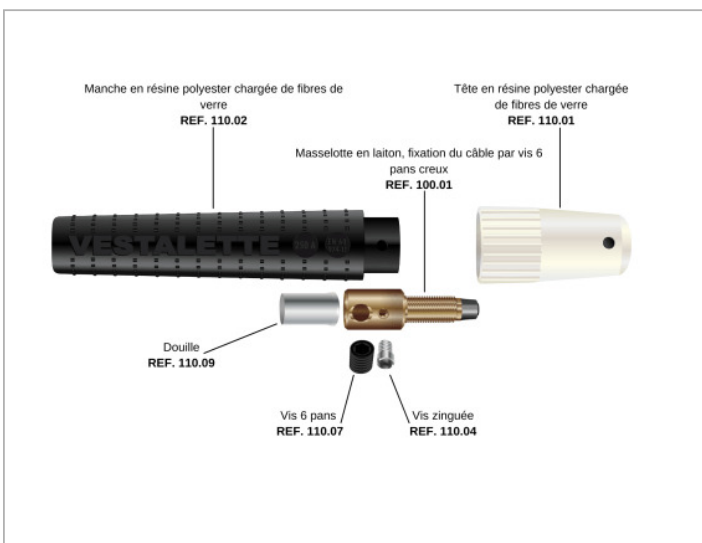

CABLE SECTION
35 mm²



MAXIMUM
ELECTRODE
DIAMETER
4 mm



INDICATIVE
UNIT WEIGHT
280 g



See on our
website

- In compliance with standard EN-60-974-11
- Electrode blocking by screwing, left-hand pitch
- Total insulation

Related spare parts:

- Ref. 110.01: fiberglass-filled polyester resin head
- Ref. 110.02: fiberglass-filled polyester resin handle
- Ref. 110.03A: brass weight, cable fastening by hexagon socket bolts
- Ref. 110.04: Screw
- Ref. 110.07: Hexagonal Screw M10
- Ref. 110.09: Connector